HEWLETT-PACKARD COMPANY ntellectual Property Administration * 🖲. O. Box 272400 Fort Collins, Colorado 80528-9599

PATENT APPLICATION

ATTORNEY DOCKET NO. 60970047-1

IN THE U.S. PATENT AND TRADEMARK OFFICE **Patent Application Transmittal Letter**

ASSISTANT COMMISSIONER FOR PATENTS Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is a(n): (X) Utility () Design

(X) original patent application,

() continuation-in-part application

INVENTOR(S): Victor Alfaro et al

TITLE:

Enhancement Technique For Asymmetrical Print Resolution

Enclosed are:

(X) The l	Declaration and Power of Attorney. () signed (\mathbf{X})	unsigned or partially signed
(x)	sheets of drawings (one set) ()	Associate Power of Attorney
() Form	PTO-1449 () Information Disclosure S	tatement and Form PTO-1449
() Priorit	y document(s) ()(Other)	(fee \$)

CLAIMS AS FILED BY OTHER THAN A SMALL ENTITY					
(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE		(5) TALS
TOTAL CLAIMS	— 20	0	X \$18	\$	0
INDEPENDENT CLAIMS	— з	0	X \$78	\$	o
ANY MULTIPLE DEPENDENT CLAIMS	0		\$260	\$	0
BASIC FEE: Design \$310.00); Utility\$(690.00)				\$	690
TOTAL FILING FEE				\$	690
OTHER FEES			\$		
TOTAL CHARGES TO DEPOSIT ACCOUNT			\$	690	

to Deposit Account 08-2025. At any time during the pendency of this 690 application, please charge any fees required or credit any over payment to Deposit Account 08-2025 pursuant to 37 CFR 1.25. Additionally please charge any fees to Deposit Account 08-2025 under 37 CFR 1.16, 1.17,1.19, 1.20 and 1.21. A duplicate copy of this sheet is enclosed.

"Express Mail" label no. EL187987826US

Date of Deposit Feb

I hereby certify that this is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to: Assistant Commissioner for Parants, Washington,

D.C. 2023

Typed Name:

Respectfully submitted,

Victor Affaro et al

David S. Romney

Attorney/Agent for Applicant(s)

Reg. No.

Date: FE6 1, 2000

Telephone No.: (801) 536-6914

PATENT APPLICATION **DOCKET NO.** 60970047-1

ENHANCEMENT TECHNIQUE FOR ASYMMETRICAL PRINT RESOLUTION

INVENTORS:

Victor Alfaro Pere Obrador Jordi Gonzalez

Drawings

Figs. 1A and 1B show a printer for the invention.

Fig. 2 shows a carriage for the printer

Fig. 3 shows a preferred print cartridge for the carriage

Figs. 4A, 4B and 4C show a flow chart.

Fig. 5 is a block diagram for the flow chart.

Figs. 6-9 show examples of how the flow chart operates.

Detailed Description of Exemplary Embodiments of the Invention

A typical embodiment of the invention is exemplified in a large format color inkjet printer/plotter as shown in Figs. 1A-1B. More specifically, Fig. 1A is a perspective view of an inkjet printer/plotter 210 having a housing 212 mounted on a stand 214. The housing has left and right drive mechanism enclosures 216, 218. A control panel 220 is mounted on the right onclosure 218. A carriage assembly 300, illustrated in phantom under a cover 222, is adapted for reciprocal motion along a carriage bar 224, also shown in phantom. The position of the carriage assembly 300 in a horizontal or carriage scan axis is determined by a carriage positioning mechanism 310 with respect to an encoder strip 320 (see Fig. 1B). A print medium 330 such as paper is positioned along a vertical or media axis by a media axis drive mechanism (not shown). As used hereing the media axis is called the X axis denoted as 201, and the carriage scan axis is called the Y axis denoted as 301.

Fig. 1B is a perspective view of the carriage assembly 300, the carriage positioning mechanism 310 and the encoder strip 320. The carriage positioning mechanism 310 includes a carriage position motor 312 which has a shaft 314 which drives a balt 324 which is secured by idler 326 and which is attached to the carriage 300.

The position of the carriage assembly in the scan axis is determined precisely by the encoder strip 320. The encoder strip 320 is secured by a first stanchion 328 on one end and a second stanchion 329 on the other end. An optical read 366 is disposed on the carriage assembly and provides carriage position signals which are utilized by the invention to achieve optimal image resistration in the manner described below.

Referring to Fig. 2, a carriage 102 is alidably mounted on support bar 172 through a bearing sleeve 171, and includes four slots 121, 123, 125, 127 for removably receiving four inkjet print cartridges. From right to left in the carriage slots are respectively mounted a black ink cartridge 120, a magenta ink cartridge 122, a cyan ink cartridge 124 and a yellow ink cartridge 126. Although the invention has been successfully demonstrated with four 300 dpi print cartridges of the type shown in Fig. 2 (see also Fig. 14), in a currently preferred embodiment the black ink cartridge has a 600 dpi nozzle resolution and therefore prints 600 dpi sized drops which require no depletion (see the area fill comparison in Fig. 17).

Referring to Fig. 3, a modified carriage 102a carries a removably mounted black ink cartridge 130, and a tri-compartment ink cartridge 132 which has separate ink reservoirs 133, 134, 136 for cyan, magenta and yellow ink, respectively.

The embodiments described herein employ a new technique which allows an inkjet printer system to print A x B resolution monochrome bitmaps where A=B in a system where A dpi is addressable in the carriage scan axis and B/2 dpi is addressable in the media advance axis. Thus, the present system and methods may be used with asymmetrical sub-pixels that are only half as wide in the X direction as they are in the Y direction.

The embodiments herein enable an inkjet printer system to utilize only the even width lines while preserving both edges without losing its ability to render one-pixel width lines. This enables it to keep the smallest detail in a bitmap image.

The present systems and methods may be accomplished in the steps illustrated in Figure

As shown in Figure 1, the present systems and methods may be accomplished in three steps. First, the AxB bitmap is processed by a narrowing process

Referring again to Figure 1, the next step is a logical combining 202 of rows of the pixel grid. In taking an A \times A bitmap and converting it to a A \times A/2 bitmap for printing, a

316339.1

problem faced was that for certain images some horizontal rows would be lost and not shown on the final A x A/2 image. To solve this problem, several rows of data were taken together and a logical operation was performed on the rows such that no horizontal row would be removed while following through the process as shown and described in relation to Figures 1-X. The logical combination of rows 202 ensures that the resulting row from the operation will have information from at least one of the rows involved in the operation and that no information will be lost.

The object of the logical combination step 202 is to downscale the raster of the image (not reduce the ink) in the vertical axis without losing information. It is necessary with the present systems and methods to downscale in order to be able to work in an asymmetric writing system (where A != B). Accordingly, the goals of this stage are different than other systems because the present embodiments are preparing a raster to be printed on an asymmetric system. Because the goals are different, the procedure also, as expected, will also be different.

In other systems two rows were worked with and processed at the same time.

In the present embodiments, there is no need to deplete in the vertical axis, because the system is only B=A/2 addressable. Accordingly, it is not possible to put double ink. With the present systems the goal is then opposite of the other systems because with the present system, the logical combination step 202 serves to add pixels instead of deplete pixels. The combination step 202, in current design, works with three rows at the same time, instead of two rows like some other systems have and currently do. The present system identifies isolated objects which would be lost in the media advance axis direction, directly related to the media advance axis resolution. Then, the present system moves these isolated objects one row upwards such that the isolated object will not not lost.

The final step as shown is a horizontal depletion step 204 is the depletion step 204. This horizontal depletion step 204 is the same as the depletion methods as described earlier except that the depletion is applied only in the horizontal direction, that is, only in the carriage scan axis and not in the media advance axis. The horizontal depletion step 204 also preserves both the horizontal edges and the vertical edges.

By using the method and steps as described, the present embodiments are able to assume a 1200×1200 image in the rendering stage and produce a 1200×600 dpi image for the writing stage without losing any resolution for one-pixel width lines. Of course, the 1200 dpi is in the scan axis and the 600 dpi is in the paper axis.

We claim as our invention:

1. A technique for bilevel printing of a figure comprising:

providing an inkjet printhead having a nozzle pitch of a first resolution;

creating a higher resolution bitmap which resolution is greater than the first resolution;

converting the higher resolution bitmap for printing onto an asymmetrical pixel grid having the first resolution in one axis and the higher resolution in a second axis, wherein said converting includes applying a depletion pattern only in the axis of higher resolution.

- 2. The technique of claim 1 wherein said converting includes applying a narrowing pattern only in the axis of higher resolution.
- 3. The technique of claim 1 wherein said converting includes applying a logical operation on certain rows of the higher resolution bitmap to determine whether or not to print any pixels which are un-preserved as a result of printing onto the asymmetrical pixel grid.
- 4. The technique of claim 3 wherein said applying includes applying a logical operation on three adjacent rows of the highter resolution bitmat.




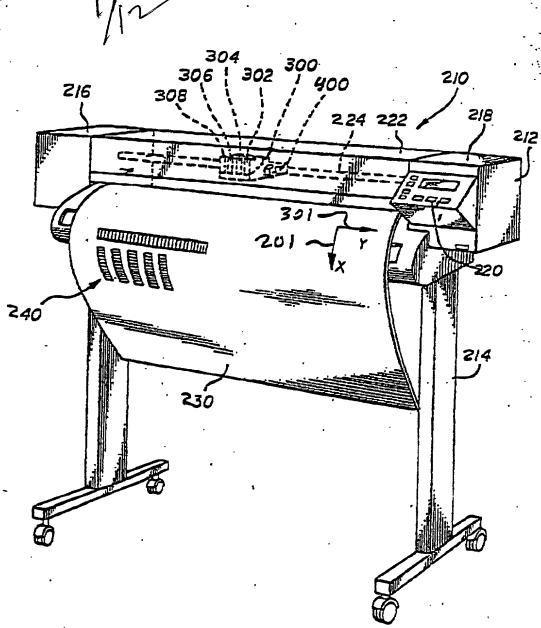



FIG. 1A

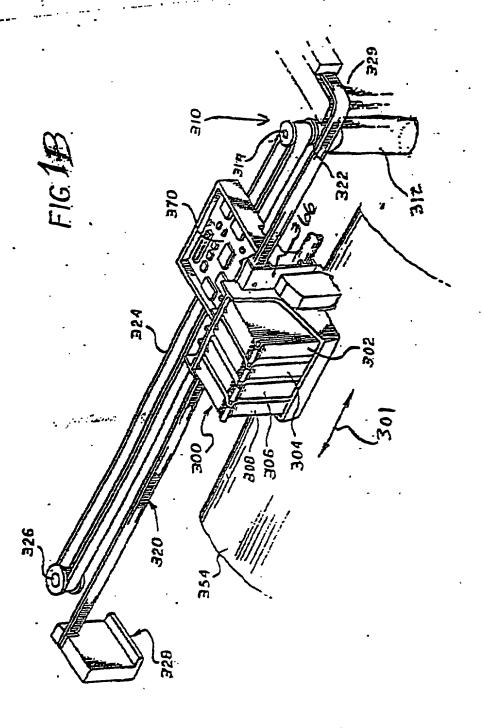

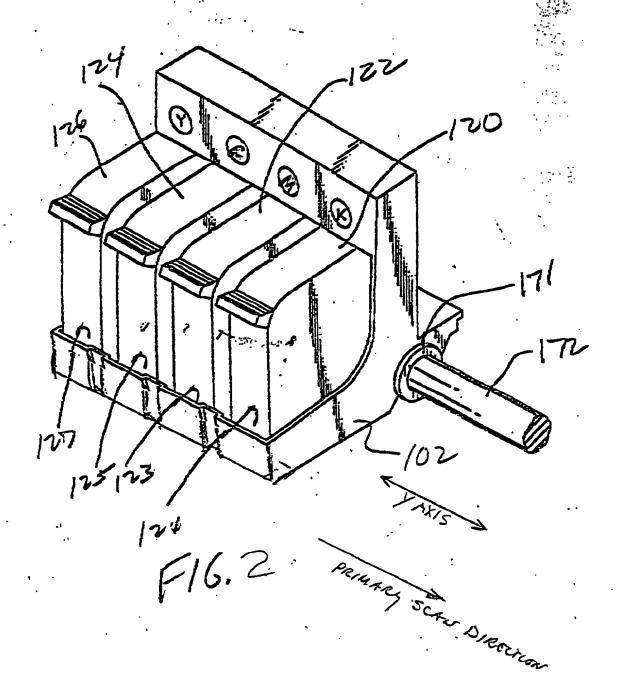


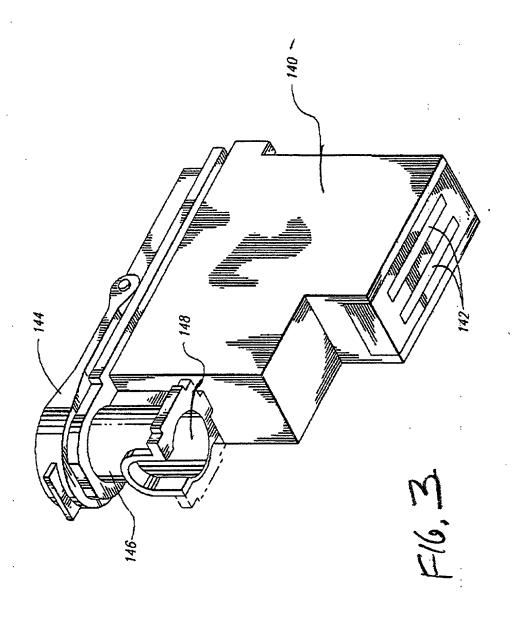


PENDER & MONOCHAME RESERVED BISACH COUNTS PENDER & MONOCHAME READER & MONOCHAME RE
LIVE WEEK
NARROW FIGURES IN HORIZONTAL AXIS ONES
DETECT VERTICAL EDGES
SHIFT LEFT I PIXEL RIGHT EDGES WHICH
ARE NOT LEFT EDGES AT SAME
DOWNSCALE IN VERTICAL AXIS THE HORIZONTAL NARROWED BITMAD
F16,4A 4B
·

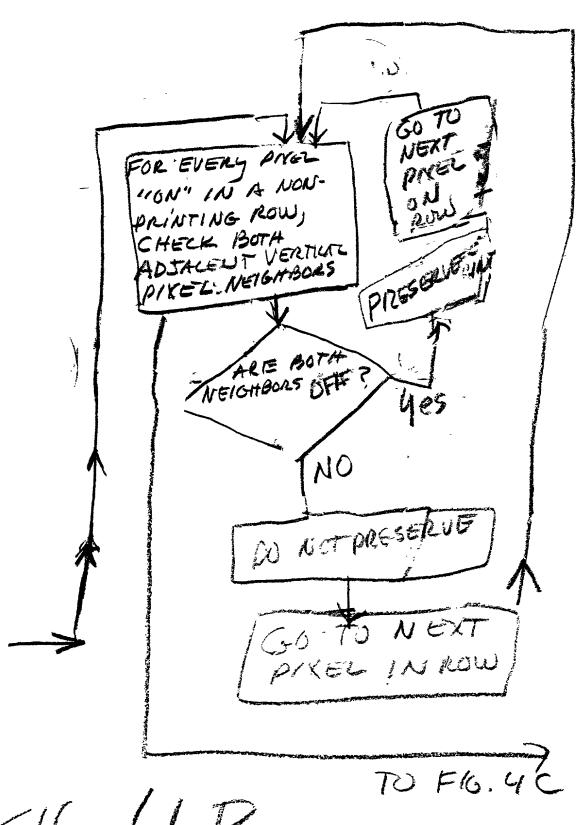


C16. 4B

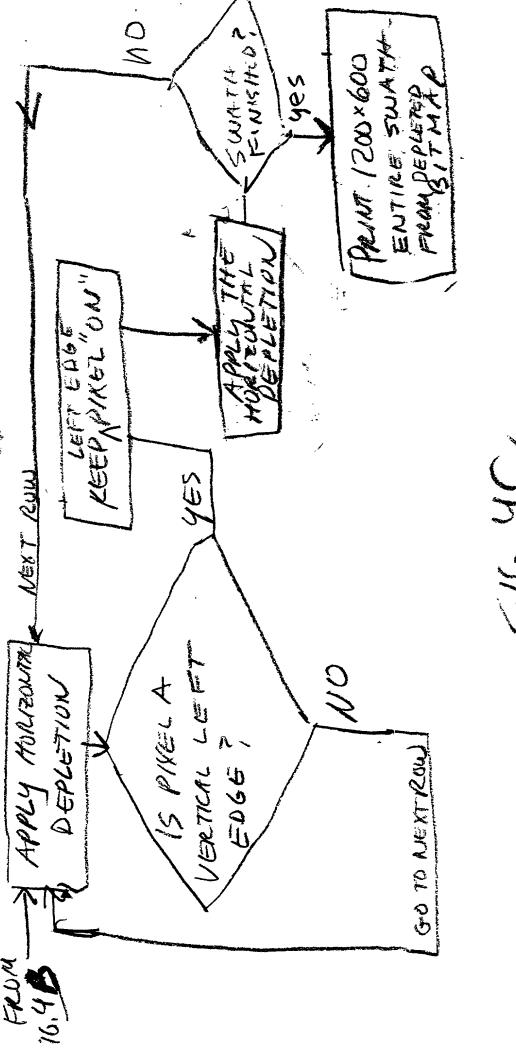


16.4C

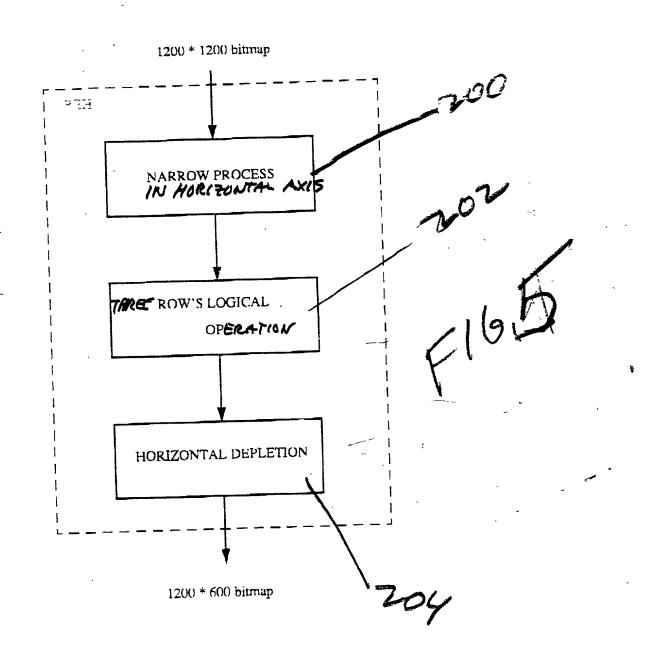

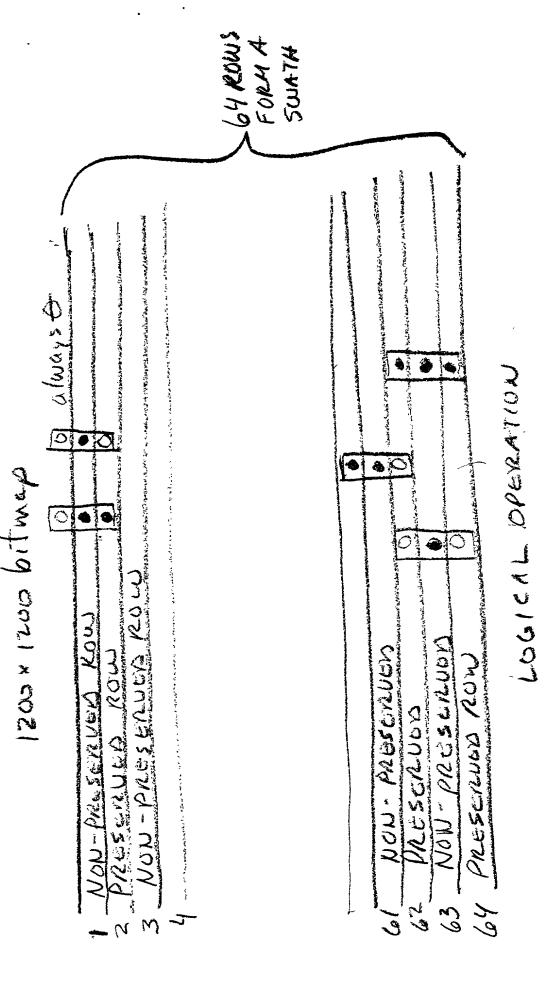


D16.6

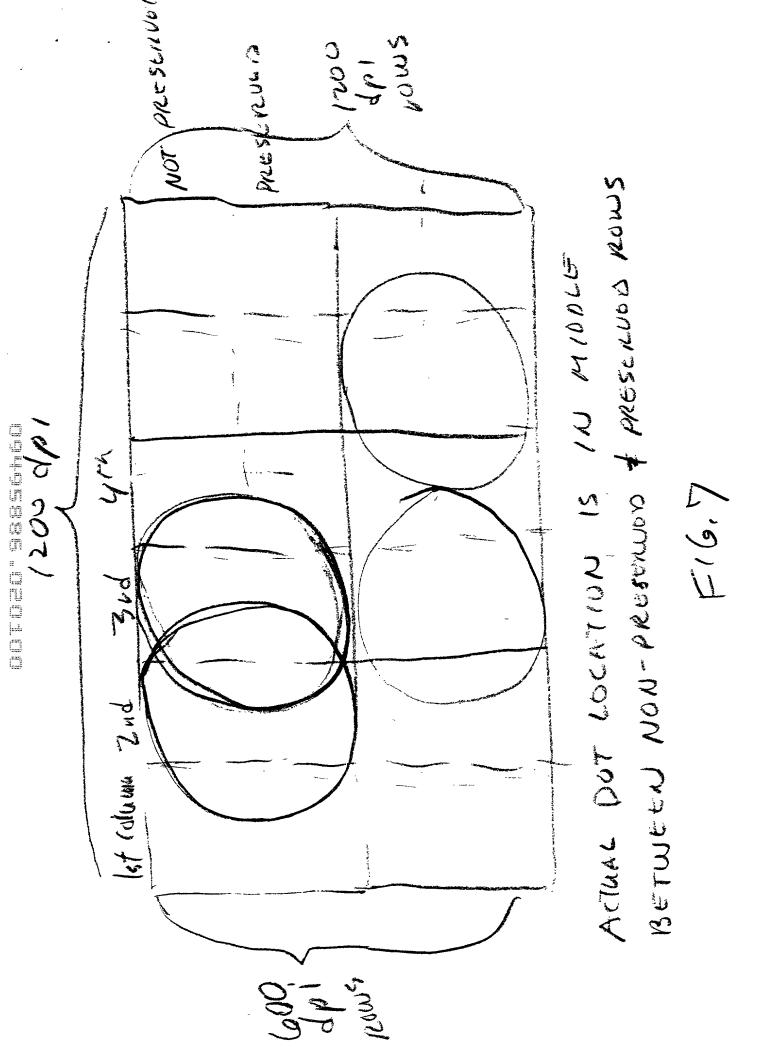

HORIZONIAL DEPLETION PATTERA W W 0 <u>्</u> 0 0 *ال*ر 0 5 回 ed 62

16.8 10-16.8

BEFORE MORIEDNIAL DEPLETION

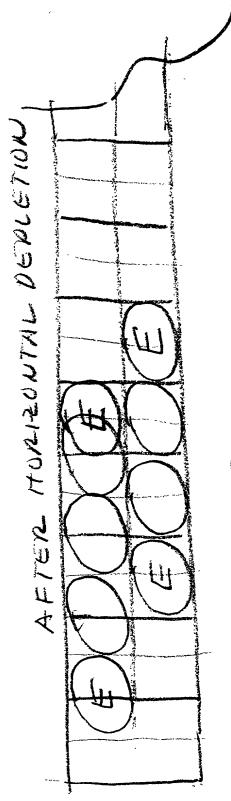

6.91

DOLOGOS DEDIOS

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

ATTORNEY DOCKET NO. 60970047-1

As a below named inventor, I hereby declare that:

My residence/post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and

joint inventor (if plural patent is sought on the i	names are listed below) of the	e subject matter whi	ch is claimed and for which a		
	For Asymmetrical Print Resolu	tion			
the specification of which	ch is attached hereto unless the	following box is chec	ykad:		
() was filed on Number	the specification of which is attached hereto unless the following box is checked: () was filed on as US Application Serial No. or PCT International Application Number and was amended on (if applicable).				
I hereby state that I hincluding the claims, as	ave reviewed and understood	the contents of the	above-identified specification,		
miventorial certificate listed be	benefits under Title 35. United Stat	IV foreign application for p	any foreign application(s) for patent or atent or inventor(s) certificate having a		
COUNTRY	APPLICATION NUMBER	DATE FILED	PRIORITY CLAIMED UNDER 35 U.S.C. 119		
			YES: NO:		
			YES: NO:		
Provisional Application I hereby claim the benefit unbelow:	der Title 35, United States Code Sec	tion 119(e) of any United	States provisional application(s) listed		
-	APPLICATION SERIAL NUMBER	FILING DATE			
-					
provided by the first paragraph	of Title 35, United States Code Section derail Regulations, Section 1.56(a) which	ot disclosed in the prior U	application(s) listed below and, insofar nited States application in the manner duty to disclose material information as ing date of the prior application and the		
APPLICATION SERIAL NUMBE		STATUS (n	atented/pending/abandoned)		
			and the state of t		
and radelliark Office	e connected therewith:	r agent(s) to prosecute this Place Customer	application and transact all business in		
Customer N	umber 022879	Number Bar Code Label here			
Send Correspondence to: HEWLETT-PACKARD COM Intellectual Property Admin		Direct Telephone Cal	ls To:		
P.O. Box 272400		David S. Romney			
Fort Collins, Colorado 805	28-9599 	(801) 536-6914			
the knowledge that willful both, under Section 100	ul false statements and the like	; and further that the so made are punisha	re true and that all statements se statements were made with ble by fine or imprisonment, or ch willful false statements may		
Full Name of Inventor: Victor	r Alfaro	Citizenship: ES			
Residence: Jau					
Post Office Address: Avda Graelis 501 08190 Sant Cugat del Valles Barcelona Spain					
Inventor's Signature					

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION (continued)

ATTORNEY DOCKET NO. 60970047-1

Full Name of # 2 joint inventor:	Pere Obrador	Citizenship:	ES		
Residence:	Santa Amelia 6-8 8o 2a 08034 Barcelona Spain				
Post Office Address:	Avda Graells 501 08190 Sant Cugat del Valles Barcelona Spain				
Inventor's Signature	Da	te			
Full Name of # 3 joint inventor:	Jordi Gonzalez	Citizenship:	ES		
Residence:	Vallcorba 19 2o 1a 08192 Sant Quirze del Valles Barcelona Spain				
Post Office Address:	Avda Graells 501 08190 Sant Cugat del Valles Barcelona Spain				
Inventor's Signature	Da	te			
Full Name of # 4 joint inventor:		Citizenship:			
Residence:					
Post Office Address:					
Inventor's Signature		te	311		
Full Name of # 5 joint inventor:		Citizenship:			
Residence:					
Post Office Address:					
Inventor's Signature	Da	10			
Full Name of # 6 joint inventor:		Citizenship:			
Residence:					
Post Office Address:					
Inventor's Signature		nte	and the second s		
	De	•••			
Full Name of # 7 joint inventor:		Citizenship:			
Residence:					
Post Office Address:		·····	Wh		
Inventor's Signature	D.	ate			
-	Da		•		
Full Name of # 8 joint inventor:		Citizenship:			
Residence:		-			
Post Office Address:					
Inventor's Signature		ote .	The state of the s		